

# Tailgating Quick Installation Guide

Last updated: May 2026

## Hardware Checklist

### Supplied by GymMaster

- 1 x GymMaster Tailgating IP Cameras
- 1 x working Gatekeeper unit

### Sourced by Installer

- 1 x 12V 1A DC Power Adaptors and/or 1 x PoE network switch (20W per port)
- 1 x Ethernet Cables

*Please note: Power supplies are NOT included. Power to the cameras can be supplied via mains or Power over Ethernet (PoE) with compatible network devices.*

## Camera Positioning

Mount the camera near the entrance between 2-2.5 meters (6-8 feet) above the ground. This should be inside the facility directly facing the door. See examples on the next page.

## Installation Steps

1. Install the cameras.
2. Connect ethernet cables from cameras to the local network. Ensure that the Gatekeeper is connected to the same physical router as the cameras.
3. Connect power adapters (if not using POE) and power on cameras.
4. Go to GymMaster: Settings > Doors & Readers > **[edit]** the required tailgating door, then use the **[Check Cameras]** button to verify their connection.
5. Use the **[Preview ... Camera]** buttons to preview a snapshot of the camera's view. Adjust the camera angle so that people's faces are clearly visible as they enter.
6. Once installed click **[Request Calibration]** in the door edit page to initiate the calibration.

Please don't hesitate to get in touch should you require any assistance with the steps above.



200 High Street,  
Christchurch City Center  
Christchurch 8011  
New Zealand


P.O. Box 13522  
Cashel Street  
Christchurch 8013  
New Zealand

[www.gymmaster.com](http://www.gymmaster.com)  
NZ (+64) 3 668 5727  
AU (+61) 3 9001 0393  
US (+1) 415 915 0375


# Tailgating Quick Installation Guide

Last updated: May 2026

## Camera Installation Examples

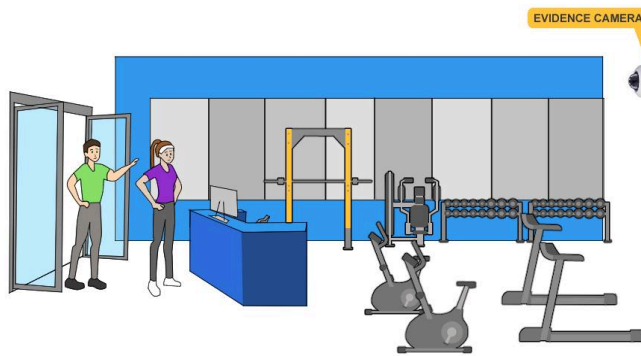

*Fig. 1: Camera mounted on the wall, facing directly toward the door*

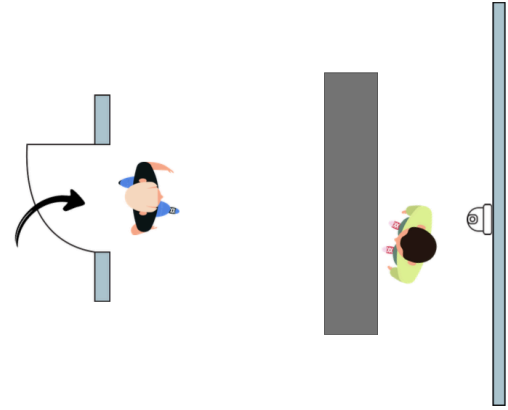

*Fig. 1.1 Top view of Fig.1*